

Easy Tile II shower system specification

EASY TILE™ BASE (TILING TRAY)

- One-piece pre-moulded base made of tough FRP composite already 100% waterproof.
- Guaranteed fall to waste 1:80.
- Square tile-in drain outlet located at centre.
- Seepage ports incorporated with drain.
- No floor structural modifications required.
- Shower base comes with factory-fitted glazing channels.
- Weight: 21kg/m².

WATERPROOFING

- Optional-Essential Connection Waterproofing Tapes available for the secure connection of the wallboard to the base upstand and from the base perimeter to the floor. Included with this optional package is a base adhesion layer.
- Compatible with all compliant liquid waterproofing products.

FRAMELESS SCREENS

- 8mm toughened glass screens at 1930mm high.
- Satin anodised wall glass receiver channels incorporate mechanical glass locking system and are machined to lock with base channels.

WASTE FITTING

- 40mm easy clean fitting

HARDWARE

- Polished stainless steel door handles supplied with all systems. E handle standard. Upgrades available.
- Adjustable bracing system – catering for uneven walls, incorporating up to +/-10mm installation tolerance.
- Chromed, solid brass self-centering hinges.


INSTALLATION

- Atlantis recommends installation of Easytile™ showers are undertaken by a qualified shower installer. See website or call 0800 428 526 for more details.



Illustration of 2-walled shower showing hinged door.

BASE PROFILE STEP ENTRY ON ANY FLOOR STRUCTURE

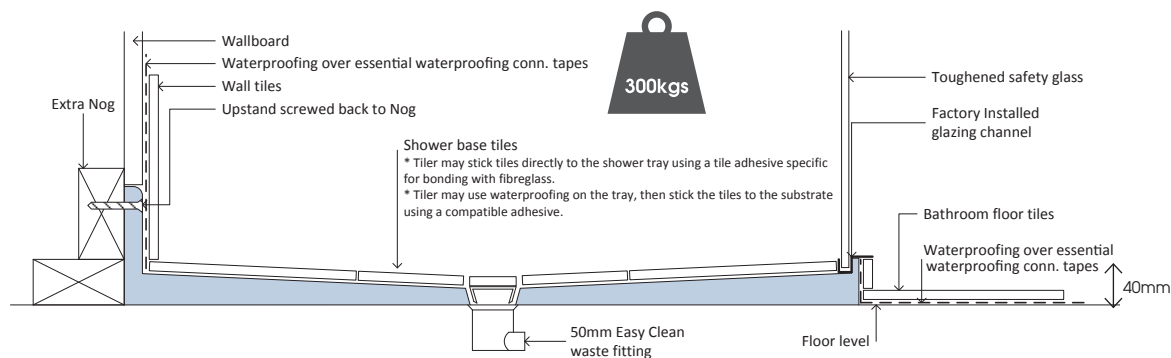

Specifications subject to change without notice. Please check www.atlantis.net.nz for latest version.