
Note: Drain position central unless dimensioned otherwise Level Entry SKU: LQ-ATH-LH-LE Step Entry 1,010 o/a 1,060 o/a SKU: LQ-ATH-LH-ST 969 1,6,65 987 987 To centre line of glazing To centre line of glazing Countersunk Upstand Upstand See Waste Channel Screw Holes to 2 sides to 2 sides **Recess Specifications** Floor Recess 484.5 484.5 505 510 1030x1030x30 1,010 o/a 1,060 o/a Fall Fall 987 line ( **Glazing Channel** Glazing Channel 484.5 484.5 500 \_ ∤ হন্দ 505 490 530 530 **Drain Section Edge Section Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor 8mm Toughened Safety Glass Screen 8 18±2 Factory Fitted 8mm Toughened Safety **Glazing Channel** Glass Screens □ 10 10 □ 110|10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted 27 Countersunk Glazing Channel Screw Holes Floor Level Shower Floor Shower Floor Recess Level <u>Floor</u> Recess Level 16 40 Depth <sub>⊲</sub> 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

## Screen Options:



All Angle Front Screens are reversible

For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/athens-1000x1000/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



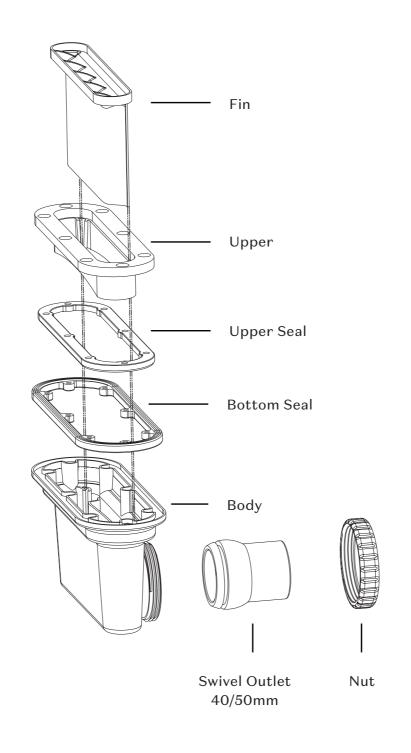

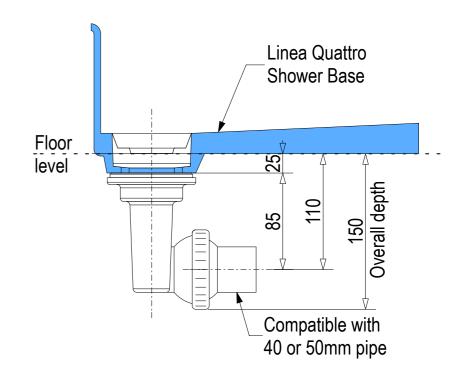

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



