
Note: Drain position central unless dimensioned otherwise Step Entry Level Entry SKU: LQ-BAR-RH-LE SKU: LQ-BAR-RH-ST 1,500 o/a 1,500 o/a 1,480 1,480 4 See Waste Channel Recess Specifications Upstand Upstand 887 To centre line of glazing 887 To centre line of glazing for size to 3 sides to 3 sides 910 o/a 960 o/a Fall Fall 895 434.5 Floor Recess 1500x930x34 Glazing Channel Glazing Channel Countersunk Screw Holes **Drain Section Drain Section Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor Floor Level 8mm Toughened Safety Glass Screen Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 10|10 Waterproofing 110 10 Upstand Upstand Flange Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes \_F<u>loor</u> Level

Note: Verify exact shower base dimensions on site

Screen Options:

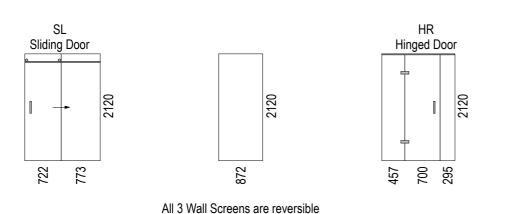

Floor

Level

<sub>⊲</sub> 31

Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor

For more product information go to:

Shower Floor

See Waste Channel Recess

Specifications for depth

information under floor

www.atlantis.co.nz/shop/linea-quattro/barcelona-1500x900/

Recess

\_16

40

Level

Recess


Depth


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



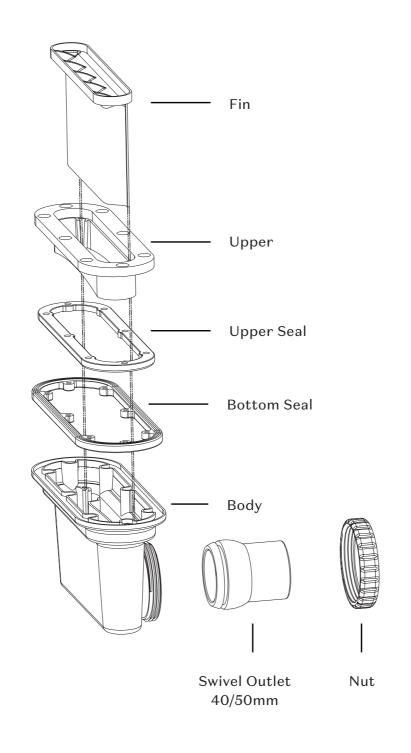

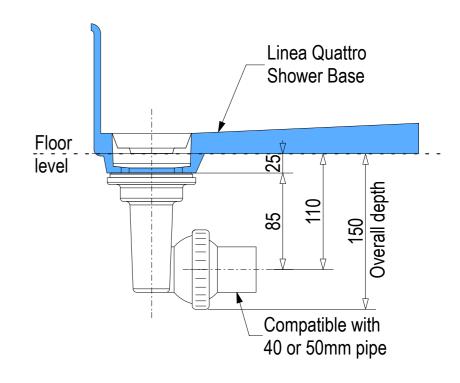

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



