


Level Entry SKU: LQ-BOS-LH-LE Step Entry 1,060 o/a SKU: LQ-BOS-LH-ST 1,010 o/a 995 65 16 969 969 See Waste Channel **Recess Specifications** Upstand Countersunk Upstand for size 434.5 877 line of glazing 434.5 to 2 sides to 2 sides Screw Holes 877 To centre line of glazing 910 o/a _ Fall Fall o/a 895 Floor Recess 1030x930x30 To centre l 434.5 434.5 Glazing Channel **Glazing Channel** 10 977 To centre line of glazing To centre line of glazing **Drain Section** Edge Section **Drain Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor 8mm Toughened Safety
Glass Screen Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 □110₁10_□ Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted Countersunk Glazing Channel Screw Holes 85 85 _Floor Level Shower Floor Shower Floor Floor Level Recess Level Recess 16 Depth 40 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

Note: Drain position central unless dimensioned otherwise

Screen Options:



For more product information go to:


www.atlantis.co.nz/shop/linea-quattro/boston-1000x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



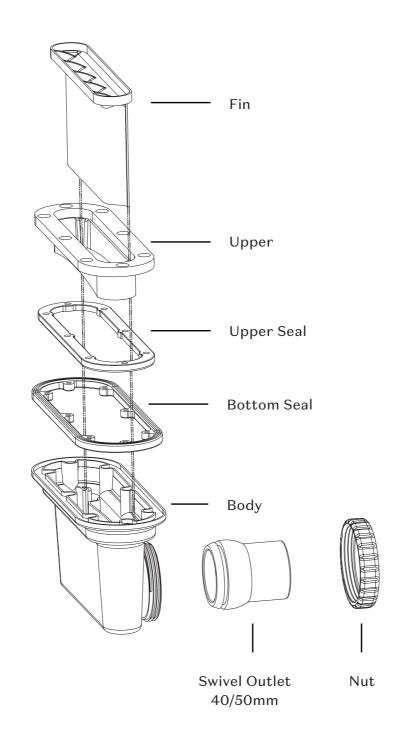

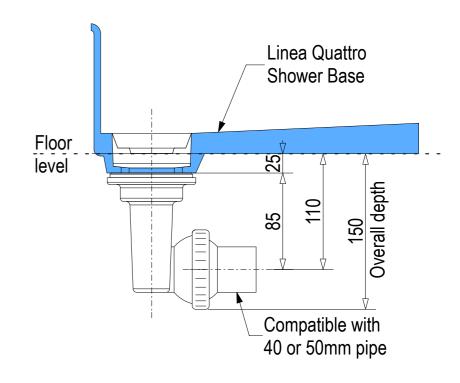

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



