



Level Entry SKU: LQ-LIS-B-LE Step Entry SKU: LQ-LIS-B-ST 1,400 o/a 1,400 o/a 1,380 1,380 4 See Waste Channel Upstand Upstand **Recess Specifications** 997 To centre line of glazing 997 To centre line of glazing to 3 sides to 3 sides 1,020 o/a 979 1,070 o/a 1,005 979 Floor Recess 1400x1040x30 Glazing Channel **Glazing Channel** Countersunk Screw Holes **Drain Section Drain Section Edge Section** Edge Section 1:80 Slope 1:80 Slope Floor Level 8mm Toughened Safety Glass Screen - Wall Framing Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 110 10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted 27 Countersunk Glazing Channel Screw Holes Floor Level Shower Floor Shower Floor Recess Level <u>Floor</u> Recess Level 16 40 Depth 31 See Waste Channel Recess See Waste Channel Recess Specifications for depth Specifications for depth information under floor information under floor Note: Verify exact shower base dimensions on site

Note: Drain position central unless dimensioned otherwise



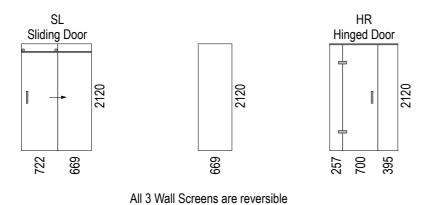

For more product information go to:

www.atlantis.co.nz/shop/linea-quattro/lisbon-1400x1000/

For installation instructions go to:


www.atlantis.co.nz/trade/installation/

## AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness





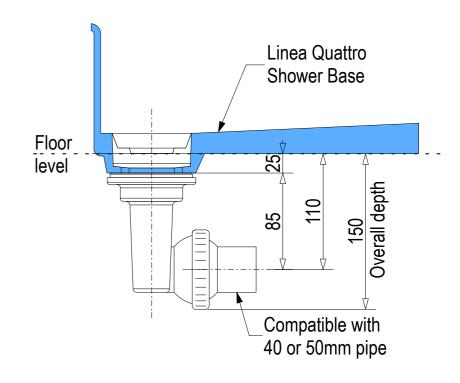

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



