


Note: Drain position central unless dimensioned otherwise Step Entry SKU: LQ-LIS-LH-ST Level Entry SKU: LQ-LIS-LH-LE 1,400 o/a 1,400 o/a 1,380 1,380 4 See Waste Channel Upstand Upstand 484.5 484.5 **Recess Specifications** 987 line of glazing 987 To centre line of glazing to 3 sides to 3 sides 1,060 o/a Fall Fall Fall 484.5 484.5 Floor Recess 1400x1040x30 **Glazing Channel** Glazing Channel Countersunk Screw Holes **Drain Section Drain Section Edge Section** Edge Section 1:80 Slope 1:80 Slope Floor Level Floor Level Floor Level 8mm Toughened Safety Glass Screen - Wall Framing Framing 8 18±2 Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 110 10 Waterproofing Upstand Upstand Flange on side wall on side wall Factory fitted 27 Countersunk Glazing Channel Screw Holes Floor Level Shower Floor Shower Floor Recess Level <u>Floor</u> Recess Level 16 40 Depth _⊲ 31

Note: Verify exact shower base dimensions on site

Screen Options:

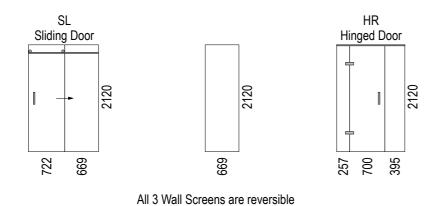

See Waste Channel Recess

Specifications for depth

information under floor

For more product information go to:

See Waste Channel Recess

Specifications for depth

information under floor


www.atlantis.co.nz/shop/linea-quattro/lisbon-1400x1000/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



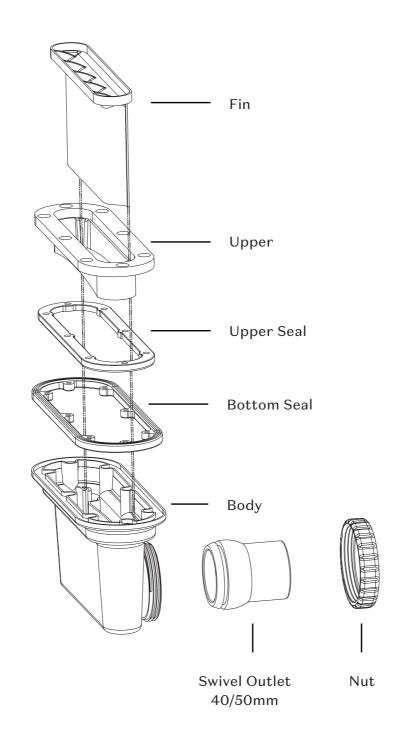

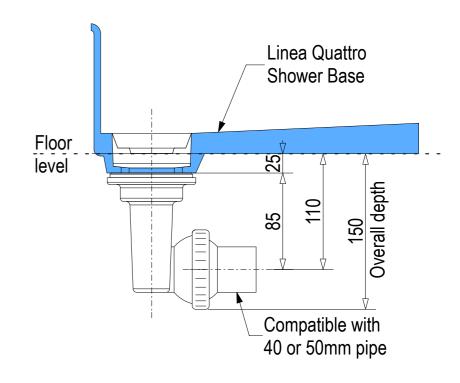

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



