


Note: Drain position central unless dimensioned otherwise Step Entry Level Entry SKU: LQ-OTT-RH-ST SKU: LQ-OTT-RH-LE 1,600 o/a 1,600 o/a 1,580 1,580 See Waste Channel **Recess Specifications** 897 line of glazing Upstand Upstand 887 To centre line of glazing for size to 3 sides to 3 sides 910 o/a 970 o/a 905 879 Fall Fa Floor Recess 1600x940x34 **Glazing Channel** Glazing Channel Countersunk Screw Holes **Drain Section Drain Section Edge Section Edge Section** 1:80 Slope 1:80 Slope Floor Level Floor Level Floor 8mm Toughened Safety Glass Screen - Wall Framing Factory Fitted 8mm Toughened Safety Glazing Channel Glass Screens 110|10 Waterproofing 110 10 Upstand Upstand Flange Factory fitted Glazing Channel on side wall on side wall Countersunk Screw Holes _F<u>loor</u> Level Shower Floor Shower Floor Recess Floor Recess Depth Level Level _16 40 _⊲ 31 See Waste Channel Recess See Waste Channel Recess

Note: Verify exact shower base dimensions on site

Screen Options:

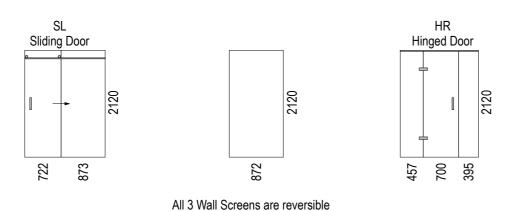

Specifications for depth

information under floor

For more product information go to:

Specifications for depth

information under floor


www.atlantis.co.nz/shop/linea-quattro/ottawa-1600x900/


For installation instructions go to:


www.atlantis.co.nz/trade/installation/

AQUAPLANE WASTE FITTING

- EasyClean Waste with in-built trap
- 50L/min ultra flow rate
- Removable fin for easy cleaning
- 40/50mm outlet with swivel fitting
- Components bolt together for guaranteed watertightness



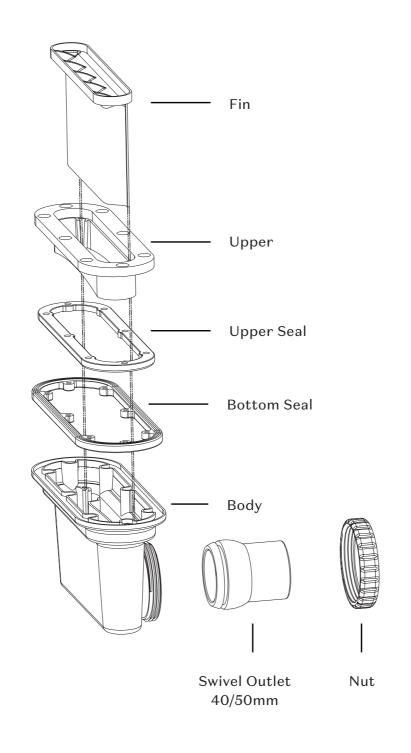

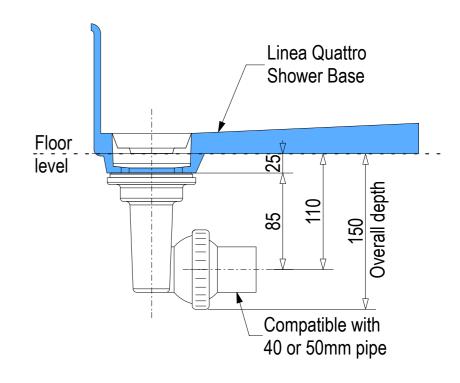

Ensure a minimum recess size of 150mm wide x 600mm long x 150mm deep for the channel drain and waste outlet



